


(single page)

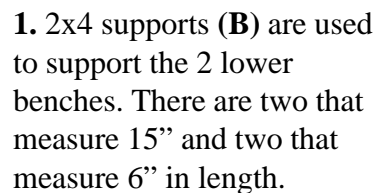

2. H-Legs (C) are used to support the upper bench near the heater.

3. Heater guard (D) screws together with the guard rail (E) which is attached to the upper bench to form a guard around the heater.

4. Attach wires from light strip to 12V transformer.

5. Attach valence to wall “opposite the heater” using screws and wood plugs (provided).

